CATHCHECK TM

Instant epidural catheter verification with CompuWave[™] Display graphing the pulsatile waveform founded in the epidural space.

Zero Pressure 150 150 150 100 120 140 End Pressure


*Catheter and adaptor sold separately

Benefits

- Saves the anesthesia provider time, enabling them to make clinical decisions faster
- Provides confirmation to the anesthesia provider post-catheter placement
- The anesthesia provider may flush with sterile anesthetic or sterile saline
- Reduces the amount of time the patient is in pain, due to an ineffective catheter
- Increases the anesthesia provider's daily effectiveness
- The CompuWave™ Display shows the pulsatile waveform found in the epidural space, again confirming needle and catheter placement

See the Difference

CATHETER DOSING VS. CATHCHECK SYSTEM

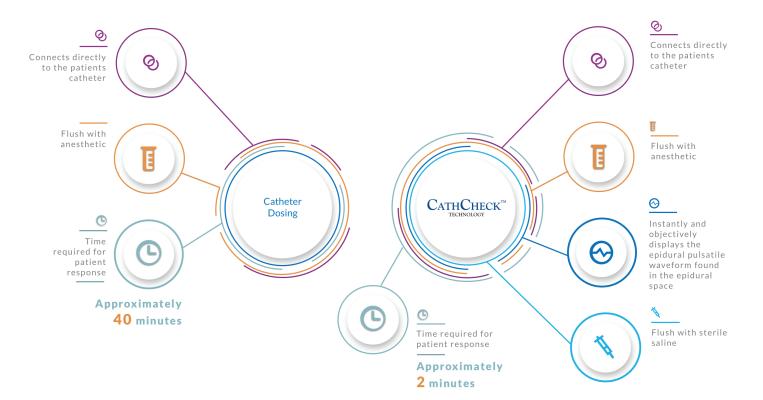

Specifications & Order Information

*Catheter and adaptor sold separately

CompuFlo® Epidural Instrument Specifications	
Voltages	100-264 V, 50/60 Hz
Internal Battery	Up to 2 hrs of use
Weight	2.3 kg (5.0 lbs)
Dimensions	24.38 x 17.15 x 14 cm (9.6 x 6.75 x 5.5 in)
Operational Temperature	10-35 °C (50-95 °F)
Operational Humidity	30-70% RH
Storage Temperature	-20-45 °C (-4-113 °F)
Storage Humidity	15-90% RH
Compliance	IEC 60601-1 3.1 (2012) Edition "Medical electrical equipment - Part 1: General requirements for basic safety and essential performance" "Medical Electrical Equipment: Part 1-2 General Requirements for Basic Safety and Essential
	Performance Collateral Standard: Electromagnetic Compatibility Requirements and Test"

CompuFlo® Instruments Specifications		
CompuFlo® Epidural Instrument 110	EPI-6000-110	
CompuFlo® Epidural Instrument 220	EPI-6000-220	

CathCheck [™] Equipment		
CathCheck™ ID Adaptor & Kit	EPI-6010-03	

CompuFlo® Instruments		
CompuFlo® Epidural ID Adaptor & Kit	EPI-6010	